

8 inch 4:3 USB Powered LCD Monitor

- 8 inch 4:3 TFT LCD
- Touch function optional
- 4-wires resistive touch panel (USB Touch as standard)
- With Speaker
- USB input & USB output
- 800 x 600 resolution
- 250cd/m² brightness / LED Backlight
- Hidden Bracket / VESA 75mm Holes




FEATURE

Hidden Bracket & Hidden USB Output

- Hidden Bracket, can make this monitor stand alone.
- Possible to connect with Keyboard, Mouse, Wireless Headphone etc through USB output.



Speaker built-in VESA 75mm Mount Holes

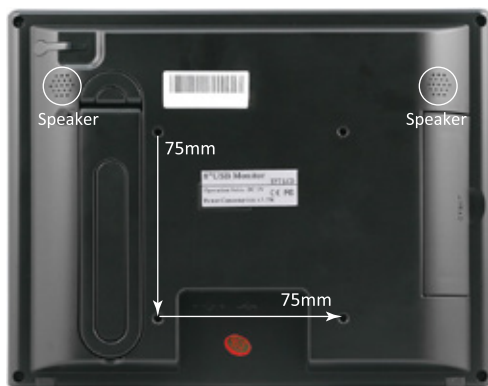

SPECIFICATIONS

Model No.	CL8602N (Without Touch Function) CL8602 NT (4-Wires resistive touch)	Speaker	x 2 (built-in backside)
Description	8 inch 4:3 USB Powered LCD Monitor	Viewing Angle	140°(H) / 120°(V)
LCD Size	8 inch	Support OS(Displaylink Program)	Windows / MAC OS
Signal Input	USB 2.0 input x 1	Power input	USB DC5V
Signal Output	USB 2.0 output x 1	Power consumption	≤8w
Resolution	800x 600	Work temperature	-20~60 C
Backlight	LED	Store temperature	-30~70 C
Dot Pitch	0.0675(W) x 0.2025(H) mm	Size(mm)	200(L) × 156(W) × 25(H)
Active area	162.0(W) x 121.5(H) mm	Weight	500g
Brightness	250cd/m ²	Certification	FCC,CE,RoHS
Contrast	500:1	Warranty Time	12 months
Aspect Ratio	4:3	Accessories	USB Cable, Drive CD (for touch), Manual



One USB Cable does it all! Not need Power adapter, not need VGA etc.

Displaylink Chip, support Windows OS, MAC OS.



Duplicate



Extend



Primary Monitor