


7 inch USB Powered LCD Monitor

- 7 inch TFT LCD, Widescreen
- Touch function optional
- 4-wires resistive touch panel (USB Touch as standard)
- Without speaker built-in
- USB input only
- 800 x 480 Resolution
- 250cd/m² brightness, LED Backlight
- Hidden Bracket / VESA 75mm Holes

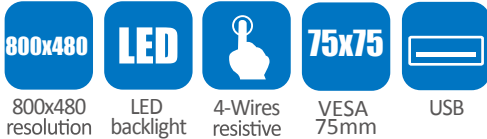

FEATURE

USB input




Hidden Bracket

Hidden Bracket, can make this monitor stand alone.



SPECIFICATIONS

Model No.	CL7603N (Without Touch Function) CL7603NT (4-Wires resistive touch)	Viewing Angle	140°(H) / 120°(V)
Description	7 inch USB Powered LCD Monitor	Support OS(Displaylink Program)	Windows / MAC OS
LCD Size	7 inch	Power input	USB DC5V
Signal Input	USB 2.0 input x 1	Power consumption	≤4.5w
Resolution	800x 480	Work temperature	-20~60 C
Backlight	LED	Store temperature	-30~70 C
Dot Pitch	0.0635(W) x 0.1905(H) mm	Size(mm)	188(L) x 123(W) x 25.8(H)
Active area	152.4(W) x 91.44(H) mm	Weight	350g
Brightness	250cd/m ²	Certification	FCC, CE, RoHS
Contrast	500:1	Warranty Time	12 months
Aspect Ratio	16:9	Accessories	USB Cable, Drive CD (for touch), Manual

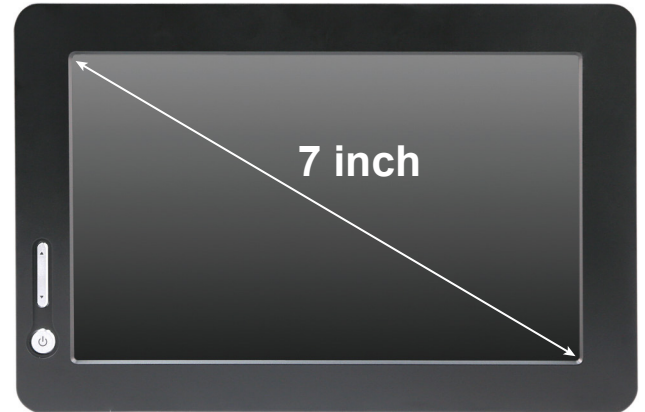

One USB Cable does it all! Not need Power adapter, not need VGA etc.

Displaylink Chip, support Windows OS, MAC OS.



Duplicate



Extend



Primary Monitor