


7 inch USB Powered LCD Monitor, Speaker built-in

- 7 inch TFT LCD, Widescreen
- Touch function optional
- 4-wires resistive touch panel (USB Touch as standard)
- With Speaker built-in
- USB input only
- 800 x 480 resolution
- 250cd/m² brightness / LED Backlight
- Hidden Bracket / VESA 75mm Holes

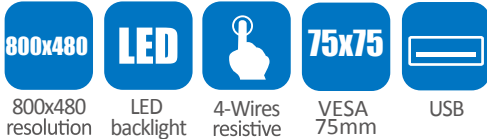

FEATURE

USB input




Speaker built-in Hidden Bracket

Hidden Bracket, can make this monitor stand alone.



SPECIFICATIONS

Model No.	CL7604N (Without Touch Function) CL7604NT (4-Wires resistive touch)	Viewing Angle	140°(H) / 120°(V)
Description	7 inch USB Powered LCD Monitor	Support OS(Displaylink Program)	Windows / MAC OS
LCD Size	7 inch	Power input	USB DC5V
Signal Input	USB 2.0 input x 1	Power consumption	≤8w
Resolution	800x 480	Work temperature	-20~60 °C
Backlight	LED	Store temperature	-30~70 °C
Dot Pitch	0.0635(W) x 0.1905(H) mm	Size(mm)	188(L) x 123(W) x 25.8(H)
Active area	152.4(W) x 91.44(H) mm	Weight	350g
Brightness	250cd/m ²	Certification	FCC,CE,RoHS
Contrast	500:1	Warranty Time	12 months
Aspect Ratio	16:9	Accessories	USB Cable, Drive CD (for touch), Powder Adapter, Manual
Speaker	x 2 (built-in backside)		

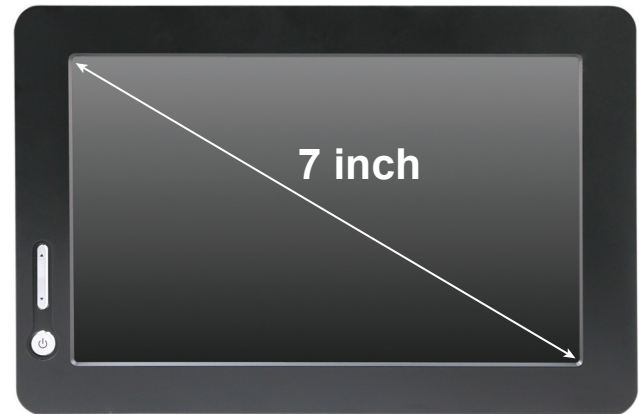

One USB Cable does it all! Not need Power adapter, not need VGA etc.

Displaylink Chip, support Windows OS, MAC OS.



Duplicate



Extend



Primary Monitor